



# Composite Burglar & Fire Safes

Our Composite Burglar and Fire safes provide an excellent storage option for all your valuable items when both burglar and fire protection are a necessity.

## CBF Standard Features:

- U.L. listed Group 2 combination lock.
- 2 independent relocking devices with glass relock trigger.
- 2-Hr. KIS fire rating.
- 1 1/4" chrome-plated locking bolts.
- 2" thick door and 3" thick body (5/16" steel in body and door with composite fire mixture).
- 2-3 dead-locking bolts to prevent entry into safe by removing hinges.
- 1/2" center bolt hole for anchoring.
- Chrome plated tri-spoke handle with gloss black dial.
- Attractive two-toned epoxy based paint finish.

## CMP Standard Features:

- U.L. listed Group 2 combination lock.
- Two spring loaded relocking devices.
- Drill resistant carburized lock mount plate.
- UL Classified \*HSS2000 HotSmoke Seal\* gasket material to minimize smoke damage inside safe.
- 3/4" chrome-plated locking bolts.
- 2 1/2" thick door and 2" thick body (3/16" steel with composite construction).
- Full-length dead bar to prevent entry into safe by removing hinges.
- Welded hinges with adjustable screw.
- 2 adjustable shelves.
- Gloss black handle and dial.
- Epoxy based paint with a Granite Multispec texture.

## Value Added Options:

- Electronic Locks.
- Bolt Holes for anchoring.
- Custom Interiors.
- Additional Shelves.
- Time delay.

## Fire Testing Standards (For CBF Series)

### K.I.S. (Korea Industrial Standards)


rated by the KSG-4500 fire resistance tests. Papers and valuable documents will remain protected in accordance with the rating standards against fire, explosion and drop impact during fires.

### 2 Hour Rating:


**Fire-** Safe is tested 2 hours in a furnace with temperatures rising to 1850° F.

**Explosion-** Heated in a furnace to 1852° F in 10 minutes, continued at temperature for 30 more minutes.

**Fire Impact-** Subjected to standard fire exposure for 45 minutes, dropped 13 feet, returned to furnace upside down, reheated 1 hour.

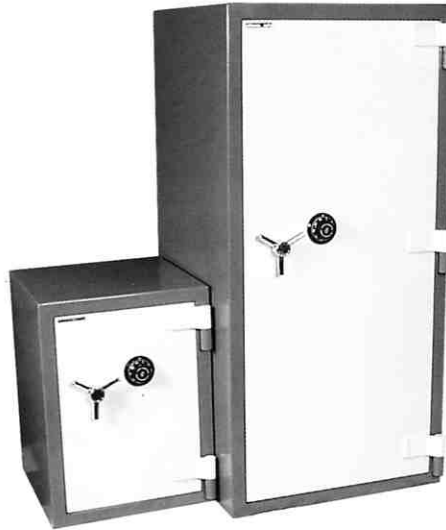

CBF-2 & CBF-6

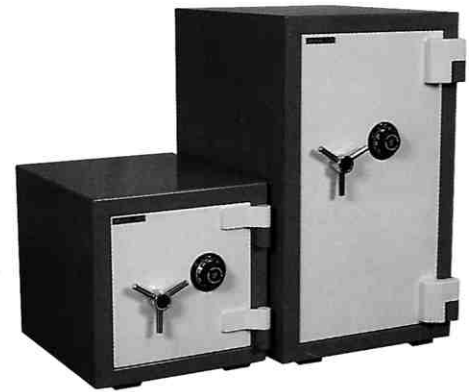

CBF-1 & CBF-3



CMP 4290 & CMP 8640

**Lifetime Replacement Guarantee!**

Adesco CMP Safes incorporate the



**HSS2000 HotSmokeSeal™ System**

HSS2000 HotSmokeSeal System is a registered trademark of PEMKO MFG. CO.

| Model No.            | Inside Dimensions |        |        | Outside Dimensions |        |                | Interior Shelves | Door Opening | Cubic Inches | Weight Lbs. |
|----------------------|-------------------|--------|--------|--------------------|--------|----------------|------------------|--------------|--------------|-------------|
|                      | H                 | W      | D      | H                  | W      | D <sup>1</sup> |                  |              |              |             |
| <b>2-Hour Rated:</b> |                   |        |        |                    |        |                |                  |              |              |             |
| CBF-1                | 12                | 11 1/2 | 12     | 17 3/4             | 17 3/4 | 20 1/2         | 1                | 12 x 12      | 1656         | 210         |
| CBF-2                | 21                | 13 1/2 | 13     | 27                 | 20     | 20 1/2         | 1                | 21 x 14      | 3686         | 325         |
| CBF-3                | 27 1/4            | 13 1/2 | 15     | 33                 | 20     | 22 3/4         | 2                | 27 x 14      | 5518         | 365         |
| CBF-4                | 27                | 21 1/2 | 21     | 33 1/4             | 28     | 29             | 2                | 27 x 22      | 12191        | 575         |
| CBF-5                | 35 1/2            | 21 3/4 | 20     | 41 1/2             | 28     | 29             | 2                | 25 x 22      | 15620        | 685         |
| CBF-6                | 54                | 23 3/4 | 21 1/4 | 59 1/4             | 28     | 29             | 2                | 54 x 23      | 26393        | 830         |
| CMP 4290             | 22                | 13     | 15 1/2 | 26                 | 17     | 22             | 2                | 22 x 13      | 4290         | 485         |
| CMP 8640             | 30                | 18     | 16     | 34                 | 22     | 22 1/2         | 2                | 30 x 18      | 8640         | 717         |

<sup>1</sup>Outside depth does not include handle and dial (allow approx. 2")