



# AMERICAN SECURITY PRODUCTS COMPANY


## U.L. Listed Fire Rated Burglary Safes

### WHEN FIRE AND BURGLARY ARE A CONCERN!

The AMSEC BF™ Series offers a unique design that combines all the security features of a burglary safe and the peace of mind achieved with a fire safe. The industry's first U.L. listed, fire rated burglary safe offers an affordable solution when burglary and fire protection are an essential part of your buying decision!

*During Underwriter's Laboratories grueling testing procedures, the BF™ series earned the U.L. listed Class 350° F, One Hour Fire Label and the (RSC) Residential Security Container Burglary Label.*

**All four models fit into a closet!**

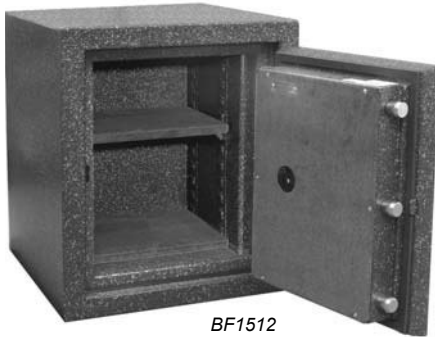

BF1512



BF2116



BF3416


#### Features:

- **The best warranty in the business. Lifetime fire replacement and one year parts and labor.**
- "B" rated heavy duty construction.
- **Door:** 3-1/2" thick, consisting of 1/2" plate steel with a unique proprietary fire and burglary resistant material.
- Dual seal design utilizes a silicone foam seal with a heat-expanding **intumescent seal**.\*
- **Body:** 2-5/8" thick, consisting of 1/8" outer and inner steel plates creating a burglary resistant structure enclosing a unique proprietary fire resistant material.
- Three massive 1" diameter solid steel chrome-plated locking bolts.
- A full length dead bar locks deep into the body preventing door removal during a forced entry attempt.
- U.L. listed Group II lock with spring-loaded auxiliary relock device.
- 1/4" heavy duty carburized hardplate.
- Heavy duty steel hinges provide easy smooth door operation.
- One recessed anchor bolt hole and mounting hardware are provided to securely anchor safe.
- Attractively accented with a large chrome-plated dial, matching handle and a plush velour interior.
- Durable and attractive granite finish with an interior of smokey gray plush velour.
- Optional electronic locks are available. See pages 35-38.



#### \* Intumescent Door Seal:

The root word, intumes, means to react by expansion. When the intumescent seal is exposed to high temperature (above 250°F), it expands to as much as 8 times its original thickness. In this expanded or reactive state, it has very high thermal insulating capacity and resistance to breakdown. This provides a strong positive seal between the door and body, preventing heat influx.

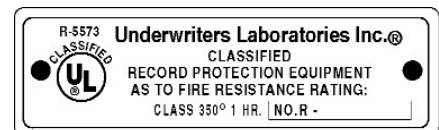

#### Lifetime Replacement Warranty:

If your BF safe is exposed to fire and failed to protect the contents, your BF safe will be replaced free of charge. Just return the safe freight prepaid to the factory accompanied with the fire report. Contact your dealer for further details.

Model No.	Inside H x W x D	Outside H x W x D**	Door Opening H x W	Cubic Inch Capacity	Wt. Lbs	Interior/ Shelves
BF1512	15 x 12 x 13	20 1/4 x 17 1/4 x 18 3/4	15 x 12	2,340	280	1
BF1716	17 x 16 1/2 x 16	22 1/4 x 21 3/4 x 21 3/4	17 x 16 1/2	4,488	385	1
BF2116	21 x 16 1/2 x 14 1/2	26 1/4 x 21 3/4 x 20 1/4	21 x 16 1/2	5024	470	1
BF3416*	34 x 16 1/2 x 16	39 1/4 x 21 3/4 x 21 3/4	34 x 16 1/2	8,976	615	2

\* U.L. Class 350°F, 30 minute fire label.

\*\*Add 2" to outside depth for handle, dial and hinge projection.